



Series 3325SF Zero Sightline Storefront

3-1/4" Architectural Grade Window System
Projected - Casement



Product Overview

The 3325SF zero sightline series is traditionally designed for storefront framed applications that offers strength, durability, and flexibility. The 3325 series is designed to allow occupants control of airflow and their overall environment.

Available prefabricated and pre-glazed, the 3325SF series is available in multiple configurations: vertical or horizontal rails allowing two vents in one frame, outswing casement, and projected out awning either with or without roto operator.

HISTORIC REPLICATION

ENERGY SAVINGS

NOISE CONTROL

GREEN COMMITMENT

Features & Custom Options

- Azon "Azo-Brader" thermally broken frame backed by a 10 year warranty against thermal break shrinkage
- A fully mitered overlap sash configuration has 1/8" wall thickness with fully sealed corners and dual weather-stripping
- Factory glazed with 1" glass and 3M VHB structural glazing tape
- Wide variety of locking and operating hardware available
- Vertical or horizontal rail allowing two vents in one opening
- Optional aluminum extruded screens
- Optional blast glazed





Performance Data*

| Type | Air (CFM/FT2 @ 6.24 PSF) | Water (PSF) | Structural (PSF) | CRF | U-Value (Btu/Hr-Ft ² -°F) | STC |
|----------------------------|-----------------------------|---|---------------------|-----|---|------------------------|
| Projected AW Grade AP-AW80 | Less than 0.10 | 12 (Higher levels may be available upon request) | +/- 120 | 63* | 0.36* | Contact your local Rep |
| Casement AW Grade C-AW80 | Less than 0.10 | 12 (Higher levels may be available upon request) | +/- 120 | 63* | 0.36* | |

*U-Value, CRF, Water and AW ratings are based on a particular type of glazing and window configuration being used. They are provided for comparison purposes only. They are based on products of standard configuration, tested in accordance with NFRC/FGIA/AAMA specifications, in a laboratory environment under optimum conditions. Performance values will vary according to project specifications, installation, size, configuration, hardware, glass, etc. Any required field testing should be done in accordance with the project specifications and FGIA/AAMA field testing protocol, not this data.



Series 3325SF Zero Sightline Detail Drawings

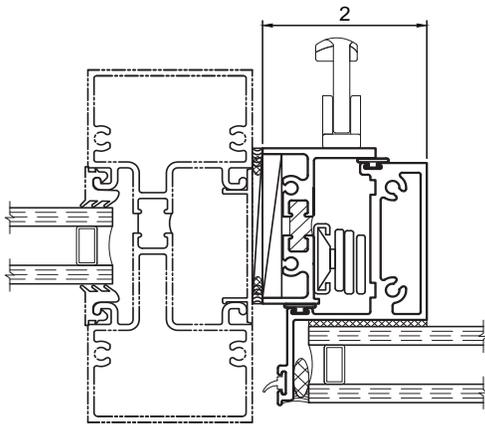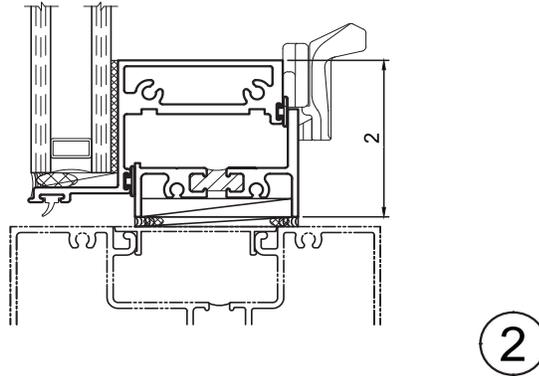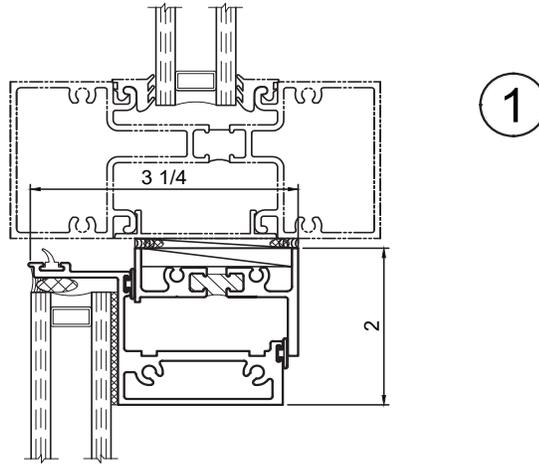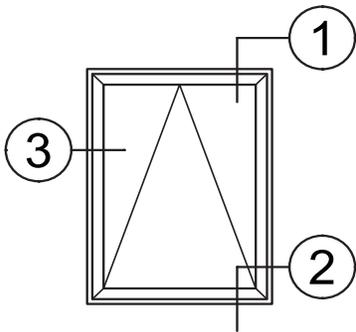

3



Winco Window Company
6200 Maple Avenue
St Louis, MO 63130

TESTING: Our products meet stringent testing requirements of both the American Architectural Manufacturers Association (AAMA) and the National Fenestration Rating Council (NFRC) standards and certification.

VER:200922

